


DC BRUSHLESS AXIAL FAN

W40S12BMD5-07

The UltraFlo series is a fan lineup that achieves high airflow, low power consumption, and long lifespan, boasting the world's top share in the communication IT field. The highly reliable fan motor is widely used in various applications. In addition to its expertise in precision small motors, it combines wind tunnel design and circuit design with safety mechanisms, offering a wide range of sizes from 1U to 4U. The lineup also includes dual-reverse fans to meet the high static pressure area required to send air into high-density enclosures, providing an effective means to increase redundancy.



CHARACTERISTIC CURVES

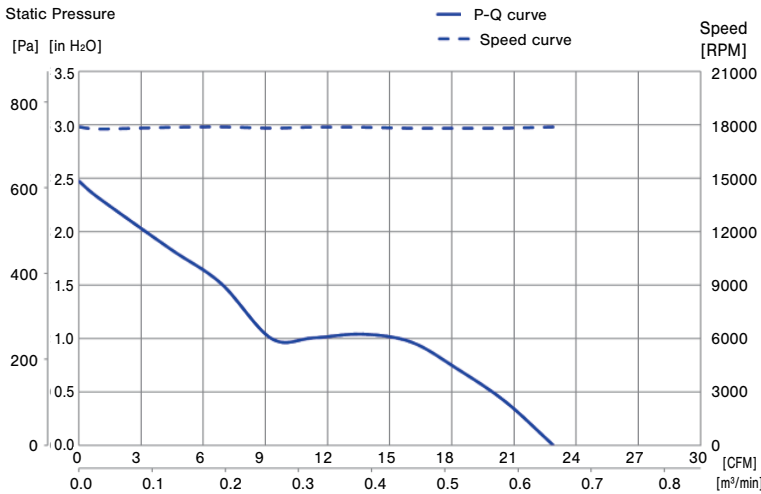

FEATURES

- 40 x 40 mm 12 VDC Brushless Fan
- High Airflow (21.8 CFM @ 0.62 m³ /min)
- Low Current Consumption 0.64 A (Nominal) 0.70 A (Peak)
- Long Lifespan 70,000 hours @ 40°C & 65 % R.H. (L10 Expectancy)
- Ball Bearings
- Single Rotor Fan
- PWM Speed Control With Tach Output

1. MECHANICAL SPECIFICATIONS

| | | |
|-----|---------------------|--|
| 1-1 | External dimensions | Refer to outline dimensions |
| 1-2 | Housing material | PBT (UL94 V-0) |
| | Impeller material | PBT (UL94 V-0) |
| 1-3 | Bearing | Ball bearings |
| 1-4 | Mass | About 60 g |
| 1-5 | Life expectancy L10 | 70,000 hours 1) At 40°C (65 % R.H.), continuous operation at rated voltage. 2) Life is defined when the motor speed decreases more than 30% against its initial speed. |


W40S12BMD5-07

DC BRUSHLESS AXIAL FAN

3. PROVISION OF REVOLUTION SIGNAL

3-1 OUTPUT OF REVOLUTION SIGNAL


- Output type: open collector type
- Electrical specification

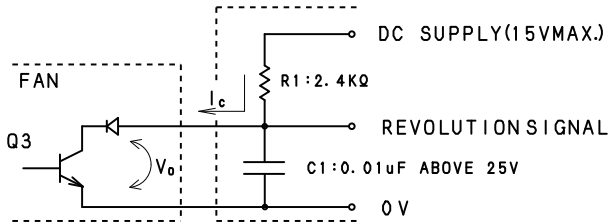

Remark: As for measuring V_{OL} , it is necessary to put a low pass filter which is constructed of R1 and C1. The time constant of $R1 \times C1$ is to be more than 24μs such as $R1=2.4\text{ k}\Omega$ $C1=0.01\text{ }\mu\text{F}$.

- Absolute maximum specification
 - Collector current $I_C=10\text{ mA Max.}$
 - Release Voltage $V_{OH}=15\text{ V Max.}$
- Electrical characteristics
 - Saturation Voltage $V_{OL}=0.8\text{ V Max.}$
 - At $I_C=5\text{ mA}$

- Output waveform

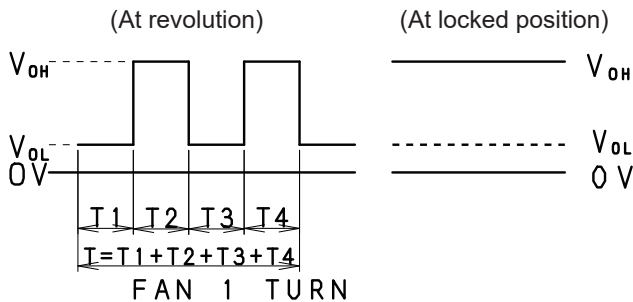

Remark: At locked position, output becomes V_{OH} OR V_{OL} .
 $T=T_1+T_2+T_3+T_4=60/N$ (Sec)
 N: Fan Speed (min^{-1})
 $DUTY = T_1 / (T_1+T_2) = 50 \pm 10\%$


3-2 ⚠ CAUTION

Please be careful that revolution signal lead wire (Yellow wire) shall not have any voltage directly applied. (It should damage inner circuit.)

4. PWM CONTROL

4-1 TYPE

The method of active/inactive drive mosfet for speed control.

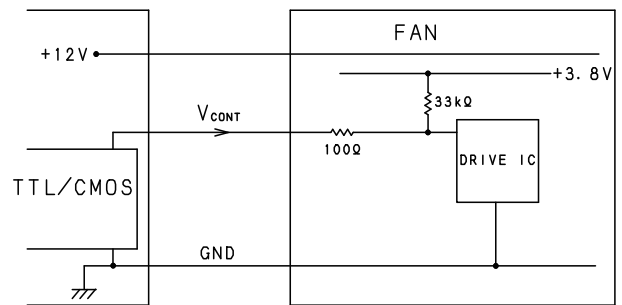


※ OD/OC=Open drain/Open collector

*Actual machine side is TTL/CMOS(OD/OC) PWM controlled.

V_{CONT} is above 2.97 V ... FAN should run full speed.
 V_{CONT} is below 0.8 V ... FAN should run low speed.
 Control wire should accept PWM control, PWM frequency is from 20 kHz to 30 kHz.

4-2 PWM CONTROL SIGNAL

Signal voltage range: 0~3.63 VDC

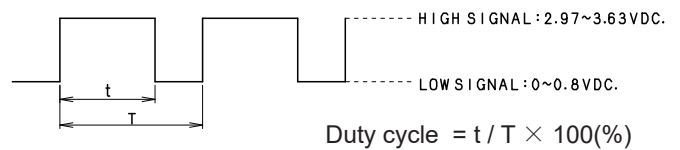


The frequency for control signal of the fan shall be able to accept at 20 kHz-30 kHz.
 PWM signal with 3.3 VDC TTL/COMS(OD/OC) level. The preferred operating point for the fan is 25 kHz, and duty cycle from 0% to 100%.
 If the PWM control wire connect to ground, the rotor will spin at low speed.
 At 100% duty cycle, the rotor will spin at maximum speed.
 If the PWM control wire open, the rotor will spin at maximum speed.

W40S12BMD5-07

DC BRUSHLESS AXIAL FAN

4-3 SPEED VS PWM CONTROL SIGNAL, AT RATED VOLTAGE

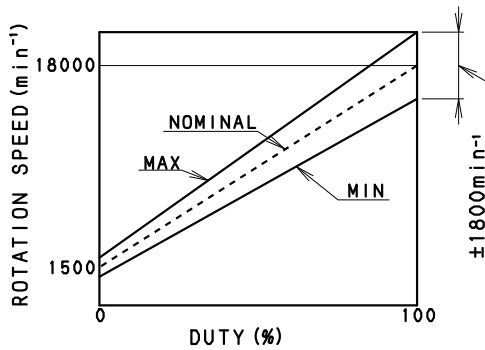

Detail of PWM curve(At 0~100%)

| Duty cycle (Positive)(%) | Speed (min ⁻¹) |
|--------------------------|----------------------------|
| 0 | 1500±500 |
| 100 | 18000±1800 |

Note: The standards should be the specified value at 23°C normal temperature(23°C) and normal humidity(60~65%), free air and 12 V, 25 kHz unless otherwise notice.

5. SPECIAL TEST

5-1 VIBRATION TEST

Standards for items 2-4~2-8 and 6-2 should be met after 30 minutes 0.2 mm amplitude, 55 Hz vibration in each direction: up-down, right-left, forward-back, in non-operating condition.


5-2 SHOCK TEST

Standards for items 2-4~2-8 and 6-2 should be met if the fans fall naturally from a height of 30 cm in the packing box for each direction.

*Dimensions of Packing Box (W x D x H) :
360 x 540 x 180 (mm)

6. OTHERS

6-1 CONNECTION

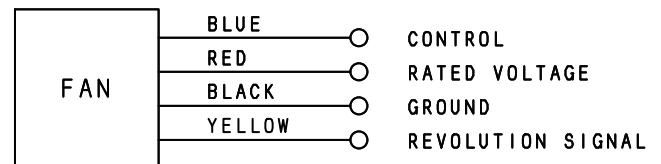

6-2 LOCKED ROTOR

No damage shall be found for continuous 1 hour at locked rotor.

6-3 ⚠ CAUTIONS IN INSTALLATION OF FAN MOTORS

Please consider system layout not to place any obstacles within 3mm from the fan housing edge of inlet side (Impeller side).

In case of screwing the fan housing, flatness of installation surface should be max. 0.1, otherwise the housing may transform and interfere with the impeller.

The fan should not get any impact or vibration during rotation. when vibration or impact is applied to the fan during rotation. The fan may break by interfering with obstacle in the system.

Please fix the fan in the system so that it will not rattle. Vibration of the fan may cause contact between the fan and the system, which will generate noise.

Please do not place any obstacle near outlet and inlet side of the fan.

Placing obstacles near the fan may deteriorate air flow. It may cause cooling performance reduction as well as fan motor life deterioration due to heavy load on the bearings. For any usage that does not meet above conditions, please evaluate at user's side or consult with us.

6-4 ⚠ USAGE OF FAN MOTOR

Please do not put resistors or other electronic components on the extension of the fan motor lead wires for the purpose of fan motor speed reduction.

It may make the voltage to the fan fluctuate and become lower than lower limit of operating voltage range.

In this case, there may be such failures like no start or unstable rotation of fan motor.

Please do not plug in or plug out the connector when the power is on. it may damage the fan.

W40S12BMD5-07

DC BRUSHLESS AXIAL FAN

7. SPECIAL ITEMS

7-1 WARRANTY

Our warranty is limited to the replacement of failed fan at free of charge, if and only if the failure is found within two years after it was shipped out from our production facility and if the cause of the failure is proven to be attributable to the supplier.

Our liability does not extend to the consequential damages caused by the failed fan.

7-2 NOTE

Please consider having an independent protection system in the customer's instruments in the event that the fan should stop operating.

7-3 POWER SOURCE

Brushless DC fans are designed to be used at DC power source with bypass capacitor. We would recommend you to use DC power source which is filtered ripple and noise.

- Fans are designed to perform as expected when stable voltage is supplied.
- Fluctuation of the voltage between Vcc(+) and GND while the fan is powered must be within the specified operating voltage range.
- Fluctuation cycle of the voltage between Vcc(+) and GND while the fan is powered must be longer than the fan's rotation cycle.
- GND of the fan must be kept below the voltage of its Vcc(+) when the voltage is switched ON/OFF or the fan is not running.
- Devices that use the fans are supposed to be designed so that the voltage applied on the revolution signal is not affected by power ON/OFF.

7-4 ENVIRONMENT-RELATED SUBSTANCES

Based on RoHS3, cadmium, lead, mercury and compound of these substances and hexavalent chromium compound, Polybromo bi-phenyl(PBB) and polybromo di-phenyl ether(PBDE) are not included in this product.

Since the mass production, according to the IEC62321 test regulation, PBB, PBDE can meet the requirement of less than 300ppm.

W40S12BMD5-07

DC BRUSHLESS AXIAL FAN

OUTLINE DIMENSIONS

(Unit:mm)

